ASSEMBLY AND INSTALLATION INSTRUCTIONS

LK33312 / LK33352 / LK40112

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. The combined weight of your ceiling fan and light kit cannot exceed 35 pounds unless additional support is provided for the fan.

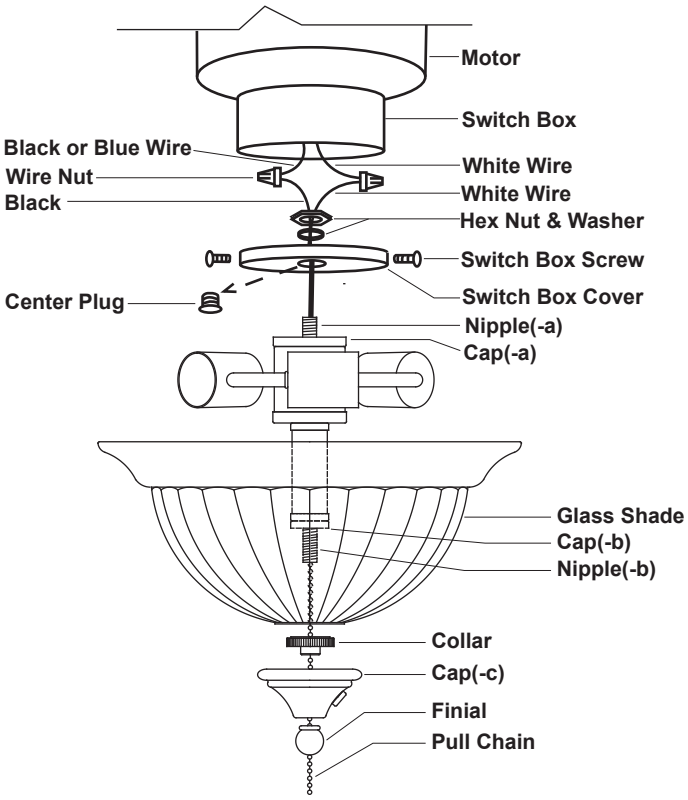

For Light Kit:

1. Remove the switch box cover from the switch box of the fan by loosing the three switch box screws.
2. Unscrew the center plug from the switch box cover and discard it.
3. Thread the fixture wire through the switch box cover.
4. Attach the switch box cover to cap(-a), then secure it with a washer and hex nut.
5. Pull out the wires from the switch box. Make wire connections using the wire nuts:
   ---The black wire from the fixture to the black (or blue) wire from the switch box.
   ---The white wire from the fixture to the white wire from the switch box.
   Carefully tuck the wires back into the switch box.
6. Attach the switch box cover back to the switch box using the three switch box screws.
7. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
8. Thread the pull chain through the glass shade and the collar, then attach the glass shade to cap(-b) by inserting nipple(-b) and secure it with the collar. Thread the pull chain through cap(-c) and the finial, then attach cap(-c) to the glass shade and secure it with the finail.
9. Turn on the power at the main fuse or circuit breaker box. (You can control the light with the pull chain.)

aireRyder™

060218

For Ceiling Light: (See Fig.1)

1. Take out the canopy set from the hardware package for ceiling light.
2. Thread the fixture wires through the canopy set. Secure the canopy set onto nipple(-a) by using the coupling.
4. Attach two screws to the mounting strap, then secure them with two lock nuts. Adjust the length of the screws if necessary.
5. Attach the mounting strap to the outlet box by using two mounting screws.
6. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
   ---The black wire from fixture to the black wire from the outlet box.
   ---The white wire from fixture to the white wire from the outlet box.
   ---Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
   Carefully tuck the wires back into the outlet box.
7. Attach canopy to the mounting strap by inserting the screws, then secure them with the bolt nuts.
8. Follow steps 7~9 as for Light Kit.

Mounting Parts for Ceiling Light

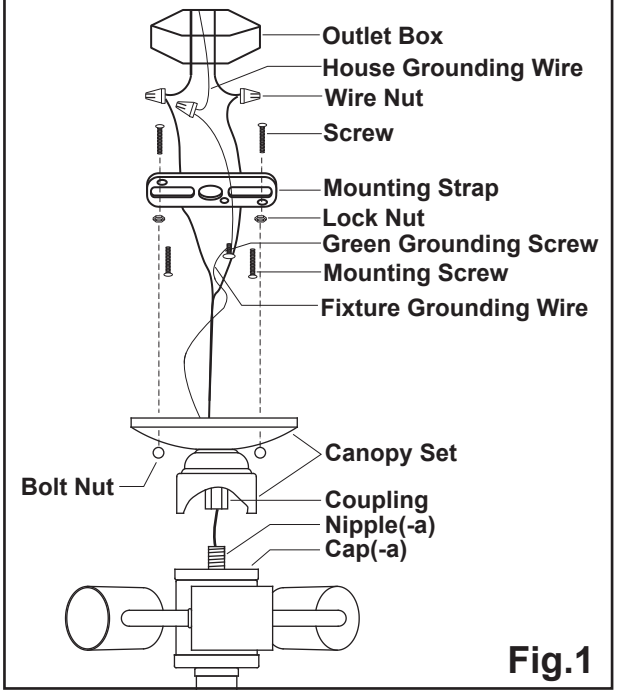

Fig.1